

TANK DIA.
UP TO **6.5 ft.** (2 m)

TANKJET® D41990 TANK CLEANING NOZZLE


TANKJET D41990 TANK CLEANING NOZZLE FEATURES AND BENEFITS

- Low pressure, low volume rinsing of small tanks and containers
- Fluid-driven reactionary force nozzle – no motor source needed to drive spray head
- Micro-size nozzle fits into very small tank openings – as small as 1 in. (25 mm)
- All 316L stainless steel construction for long wear life and corrosion resistance
- Suitable for high temperature applications up to 265°F (130°C)
- ATEX-certified versions available upon request



R
RINSING

SPRAY COVERAGE



MOUNTING OPTIONS

Vertical	↑	↓
Horizontal	←	→
45° Up	↖	↗
45° Down	↙	↘



TankJet D41990
tank cleaning nozzle



TankJet D41990
tank cleaning nozzle,
see page D18

For lances, mounting kits, adapters and more,
see page G6

SPECIFICATIONS

TankJet D41990 Tank Cleaning Nozzle	
Max. tank diameter:	6.5 ft. (2.0 m)
Operating principle:	Fluid-driven reactionary force
Flow rate:	2.4 to 10.6 gpm (9.0 to 40 lpm)
Operating pressure:	15 to 60 psi (1.0 to 4.0 bar)
Max. temperature:	265°F (130°C)
Materials:	316L stainless steel
Inlet connection:	3/8", 1/2", 3/4" NPT or BSPT (F), CIP 182 or 192
Optional accessories:	Strainers, recommended mesh size: 200 (74 micron) See page G2

IDEAL FOR CLEANING:


- Chemical tanks
- Beverage tanks
- Canisters
- Food tanks
- Kegs/drums
- Totes/containers

ADDITIONAL SIZES AVAILABLE

For D41990 up to 16 ft. see page D18



PERFORMANCE DATA

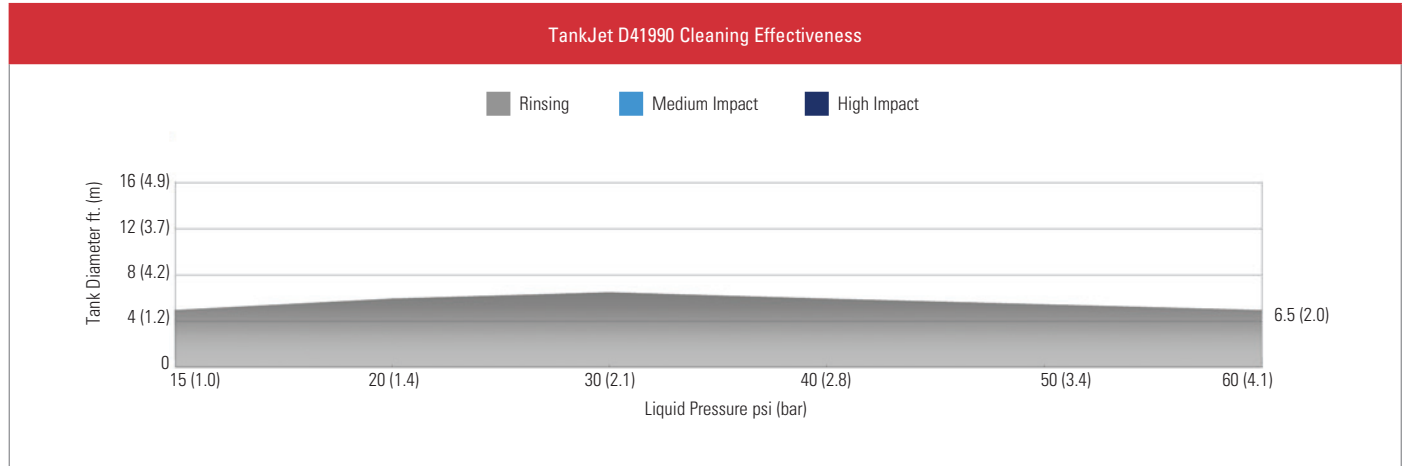

Nozzle Inlet	Capacity Size	Liquid Flow Capacity gpm (lpm)					
		15 psi (1.0 bar)	20 psi (1.4 bar)	30 psi (2.1 bar)	40 psi (2.8 bar)	50 psi (3.4 bar)	60 psi (4.1 bar)
3/8	3.2	2.4 (9.0)	2.7 (10.1)	3.1 (11.6)	3.4 (12.8)	3.6 (13.7)	3.9 (14.6)
	4.5	3.3 (12.5)	3.7 (14.1)	4.3 (16.3)	4.8 (18.1)	5.1 (19.4)	5.5 (21)
	6	4.4 (16.5)	4.9 (18.7)	5.7 (22)	6.4 (24)	6.9 (26)	7.3 (29)
	9	5.2 (19.5)	6.1 (23)	7.5 (29)	8.7 (33)	9.6 (26)	10.6 (40)

DIMENSIONS AND WEIGHTS

TankJet D41990 Tank Cleaning Nozzle	Inlet Conn. Size/Type	L in (mm)	A in (mm)	B in (mm)	C in (mm)	Pin Length in (mm)	Min. Tank Opening in (mm)	Weight lbs. (kg)
	3/8" Threaded	2.4 (60)	0.71 (18)	0.79 (20)	-	-	1 (25)	0.12 (0.05)
	CIP182	3.0 (77)	0.71 (18)	0.85 (21.5)	0.72 (18.2)	1.54 (39)	1.63 (41.4)	0.12 (0.05)

Additional sizes available:
Page D18 – 1/2 in., 3/4 in. and CIP192 conn.

ORDERING INFORMATION

TANKJET D41990 TANK CLEANING NOZZLE

Nozzle Type

Spray Coverage

Inlet Conn. Size/Type*

Material Code

Capacity Size

EXAMPLE

D41990
E
-
3/8
-
316L
-
3.2

*Add B prior to inlet connection for BSPT connections.

