

**TANKJET 27500 AND 27500-R TANK CLEANING NOZZLE  
FEATURES AND BENEFITS**


- With rotation driven by the reactionary force of the cleaning liquid, these nozzles provide excellent cleaning and rinsing and are especially well-suited for clean-in-place (CIP) systems
- Spray angles range from 180° to 360° and can be used to clean specific areas or the entire tank interior
- Made of corrosion- and chemical-resistant PTFE fluoropolymer resin, both models provide peak performance when used with debris-free liquid and deliver greater impact than static spray balls
- 27500-R nozzles with removeable spray heads, 1/2 in. and 3/4 in. inlet connections, are also available in carbon-filled PTFE for improved thermal characteristics and higher mechanical strength. See page D4 and E4
- ATEX-certified versions available



TankJet 27500-R tank cleaning nozzle, see page D4 and E4



**SPRAY COVERAGE**

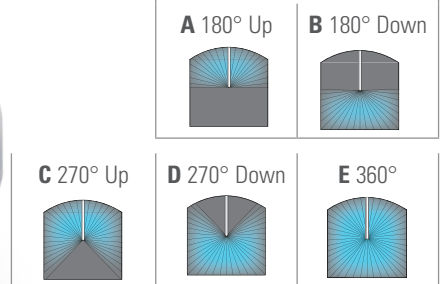

**MOUNTING OPTIONS**

Vertical	↑	↓
Horizontal	←	→
45° Up	↖	↗
45° Down	↘	↙

TankJet 27500 tank cleaning nozzle


**SPECIFICATIONS**

TankJet 27500 Tank Cleaning Nozzles	
Max. tank diameter:	25 ft. (7.6 m)
Operating principle:	Fluid-driven reactionary force
Flow rate:	125 to 391 gpm (475 to 1480 lpm)
Operating pressure:	10 to 50 psi (0.7 to 3.4 bar)
Max. temperature:	200°F (93°C)
Materials:	PTFE fluoropolymer resin
Inlet connection:	3" NPT or BSPT (F)
Optional accessories:	Strainers, recommended mesh size: 100 (150 micron) See page G2

For lances, mounting kits, adapters and more, see page G6

**DIMENSIONS AND WEIGHT**

Model	Inlet Conn. in.	W in. (mm)	L in. (mm)	F (Flats) in. (mm)
27500	3	6.88 (174.6)	5.88 (149.2)	3.88 (98.4)




Additional sizes available:  
Page D4 – 3/4, 1 and 2 in. conn.  
Page E4 – 3/8 and 1/2 in. conn.

**IDEAL FOR CLEANING:**

- Broke chests
- Chemical tanks
- PCB washers
- Pharmaceutical tanks
- Process tanks



**PERFORMANCE DATA**

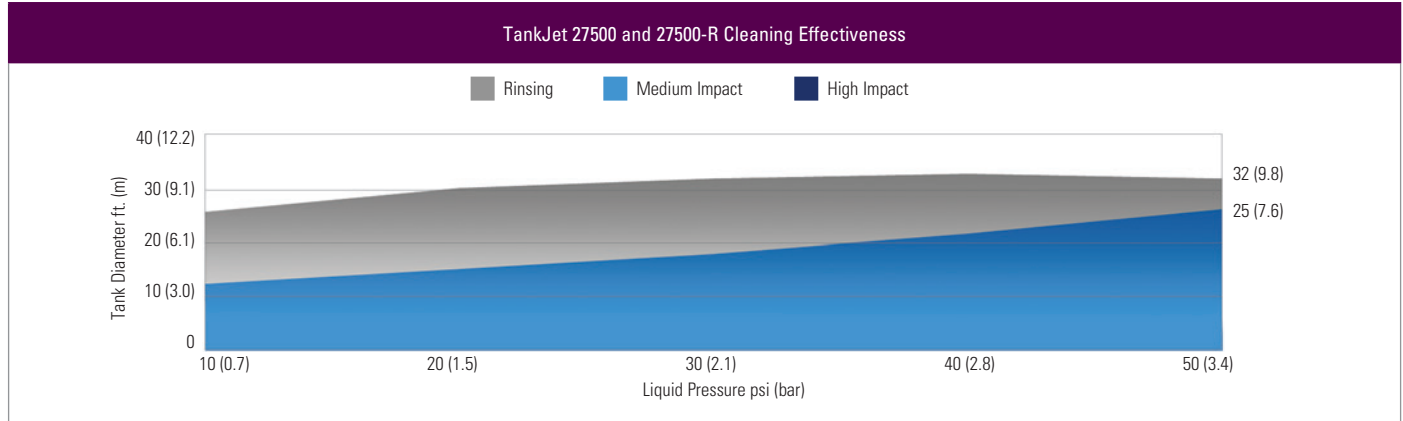


Model 27500		Orifice Dia. in. (mm)	Liquid Flow Capacity gpm (lpm)					Max. Tank Dia. ft. (m)
Inlet Conn. Size	Capacity Size		10 psi (0.7 bar)	20 psi (1.5 bar)	30 psi (2.1 bar)	40 psi (2.8 bar)	50 psi (3.4 bar)	
3	250	0.390 (9.9)	125 (475)	177 (700)	217 (805)	250 (985)	280 (1065)	25 (7.6)
	300	0.422 (10.7)	150 (570)	212 (840)	260 (965)	300 (1180)	335 (1280)	25 (7.6)
	350	0.484 (12.3)	175 (665)	247 (975)	303 (1130)	350 (1380)	391 (1480)	25 (7.6)

Suggested optimum operating range: 20 to 40 psi (1.5 to 2.8 bar).

**ADDITIONAL SIZES AVAILABLE**  
 Page D4 – 3/4, 1 and 2 in. conn.  
 Page E4 – 3/8 and 1/2 in. conn.

**ORDERING INFORMATION**

**TANKJET 27500 TANK CLEANING NOZZLES**

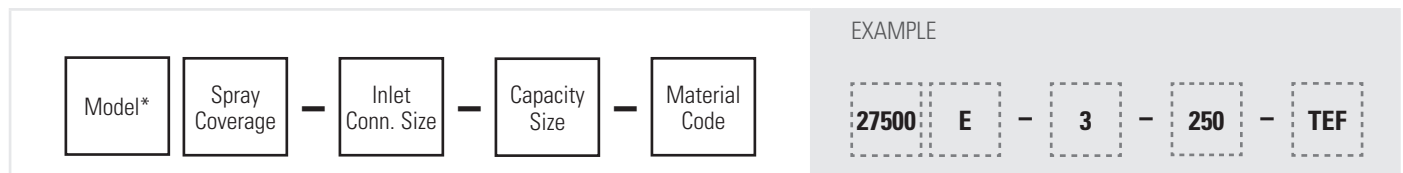

\*Add B prior to nozzle size for BSPT connections.



PAWIN Engineering Co., Ltd.  
 168 อาคาร Axiom 1 บ. 7 ถ. สี่แยกคอกะตือ อ. บางพลีใหญ่  
 อ. บางพลี จ. สมุทรปราการ 10540



Spraying Systems Co.®